

# SCH 105 *XSafe*

## Self Contained Ice Machine 90 kg

# SIMAG

Item
Project
Quantity



### FEATURES

- Resistant stainless steel exterior.
- Low power and water consumption
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- R290 refrigerant
- Magnetic Ice Scoop
- Only for OX series - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



SCH L  
Large Gourmet 39 g  
Ø 38 mm - H 41 mm



SCH M  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm

### CONDENSING SYSTEM

air cooled  
water cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
SCH L	Large	38 mm	41 mm	39 g
SCH M	Medium	30 mm	34 mm	20 g

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.simag.it](http://www.simag.it)

Self Contained Ice Machine 90 kg

May 2025


# SCH 105 *XSafe*

## Self Contained Ice Machine 90 kg



Item
Project
Quantity

Self Contained Ice Machine 90 kg

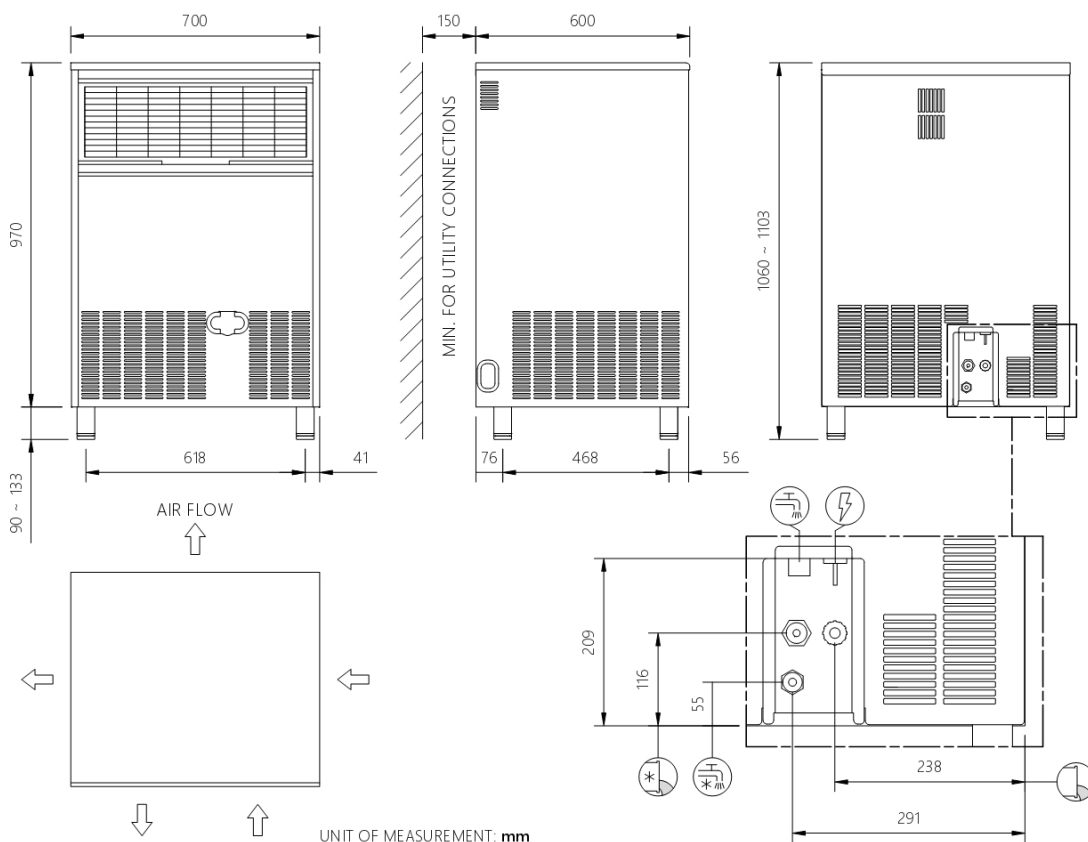

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
700 x 600 x 970 mm			770 x 680 x 1050 mm									
62 kg			69kg									
Version	Voltage	Condensation	24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
			10°C/10°C	21°C/10°C	32°C/21°C							
SCH 105 AS OX	230\50\1	A	90	87	71	49	1,5	15	9	770	3 x 1,5	10
SCH 105 WS OX	230\50\1	W	88	86	76	49	1,7	13	59	560	3 x 1,5	10
SCH L 105 AS	230\50\1	A	76	74	61	49	1,0	14	9	730	3 x 1,5	10