

# SCH 30

Self Contained Ice Machine 34 kg



Item
Project
Quantity



## FEATURES

- Resistant stainless steel exterior.
- Low power and water consumption
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- R290 refrigerant
- Only for OX series - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



SCH L  
Large Gourmet 39 g  
Ø 38 mm - H 41 mm



SCH M  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm

## CONDENSING SYSTEM

water cooled  
air cooled

## REFRIGERANT GAS

R290

## VOLTAGE

V/HZ/PH  
230\50\1

Model	Cube	Ø	H	Weight
SCH L	Large	38 mm	41 mm	39 g
SCH M	Medium	30 mm	34 mm	20 g

## OPERATING REQUIREMENTS

## CERTIFICATIONS



	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

## IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.simag.it](http://www.simag.it)

Self Contained Ice Machine 34 kg

May 2025


# SCH 30

## Self Contained Ice Machine 34 kg



Item
Project
Quantity

Self Contained Ice Machine 34 kg

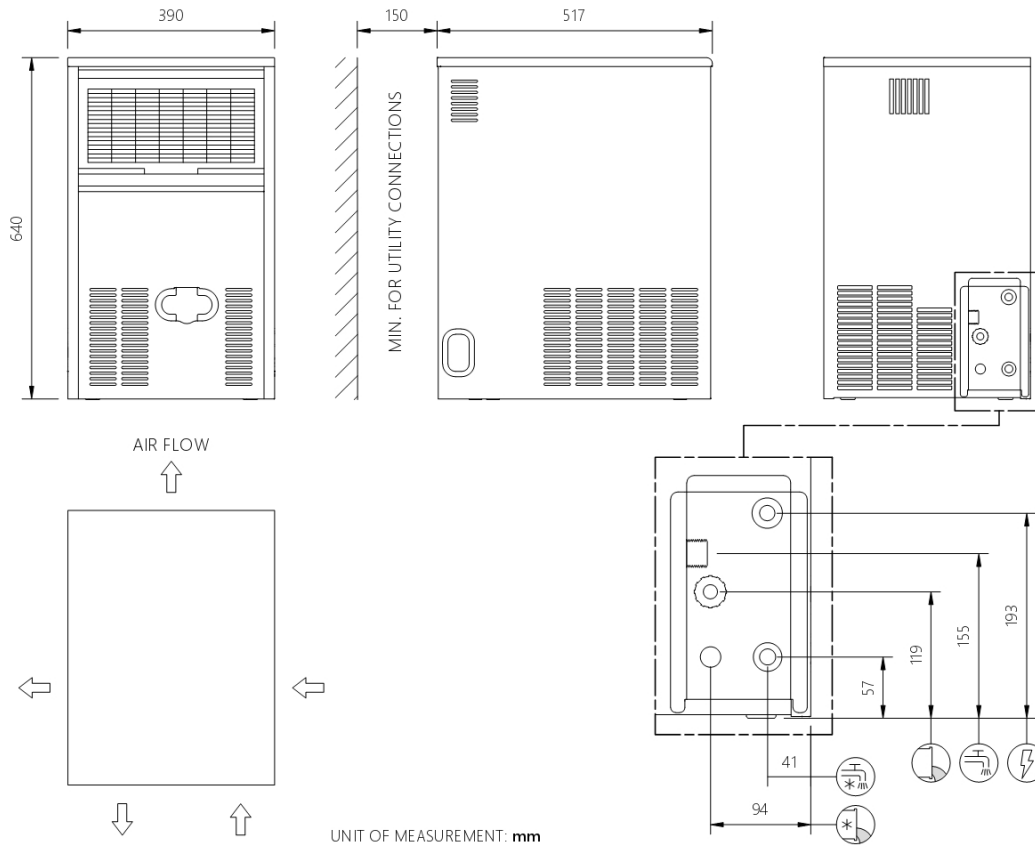

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
390 x 515 x 638 mm			460 x 580 x 760 mm									
32 kg			38kg									
Version	Voltage	Condensation	24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
			10°C/10°C	21°C/10°C	32°C/21°C							
			kg	kg	kg	kg	kW	kWh/24h	l/h	W	No. x Ømm <sup>2</sup>	A
SCH 30 WS	230\50\1	W	34	33	28	8	0,6	6	29	275	3 x 1,5	10
SCH L 30 AS	230\50\1	A	33	30	25	8	0,5	7	4	340	3 x 1,5	10
SCH L 30 WS	230\50\1	W	33	30	27	8	0,6	6	29	275	3 x 1,5	10
SCH 30 AS	230\50\1	A	31	29	25	8	0,5	7	4	340	3 x 1,5	10