

51 kg Self-contained Ice Machine

Complete Range: SCH 20 - SCH 30 - SCH 40 -SCH 50 - SCH 65 - SCH 90 - SCH 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290
- Only for OX series - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



Internal bin capacity



22 kg of Ice

1222 cubes


Type of ice



34 mm



30 mm



Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH

467 x 570 x 880 mm

Net weight

38 kg

Shipping size WxDxH

540 x 640 x 900 mm

Shipping weight

44 kg

Technology and Certifications



SIMAG

Via Lainate 31 - 20010 Pogliano Milanese - (Milano) Italy

Tel. +39.02.93960323

e-mail: sales@simag.it


www.simag.it

SCH 50



51 kg Self-contained Ice Machine

Complete Range: SCH 20 - SCH 30 - SCH 40 -SCH 50 - SCH 65 - SCH 90 - SCH 105

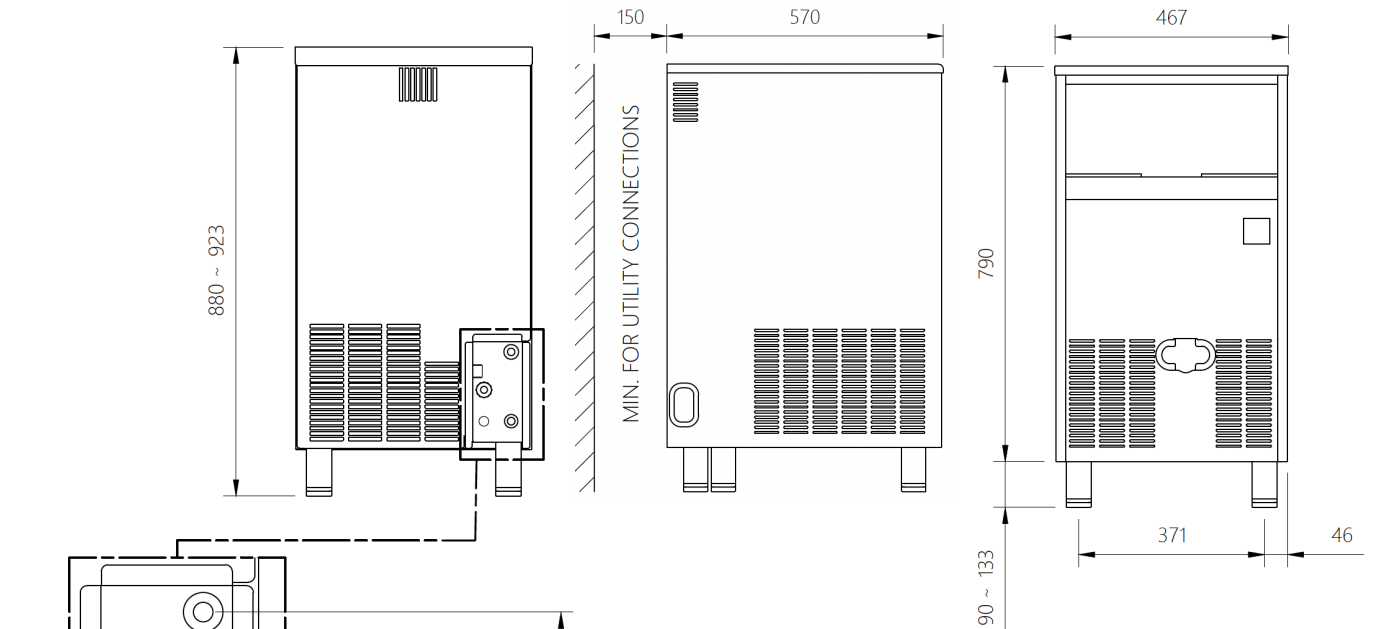

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-06 %	+06 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
SCH 50 A	230/50/1	51	47	640	R290	0,14	10	40,7	12,2	4,4
SCH 50 W	230/50/1	52	48	476	R290	0,125	10	22,6	7,0	28,0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water