

SCH 50

Ice maker with built-in bin, up to 51 kg

SIMAG



CHARACTERISTICS

- Stainless steel construction with Scotch Brite finish
- Vertical Pump and Limescale Prevention System
- Easy access for maintenance
- High water and electricity savings
- Excellent ratio between ice production and storage capacity
- Double defrost system
- R290 refrigerant
- Compact size



SCH M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

Model	Cube	Ø	H	Weight
SCH M	Medium	30 mm	34 mm	20 g

CONDENSING SYSTEM

Air
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1

BIN CAPACITY

KG
22

CERTIFICATIONS



OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE

Models and specifications are subject to change without notice.
This spec sheet is for sales purposes only. For technical
documentation, please refer to our service manuals.

www.scotsman-ice.it

SCH 50

Ice maker with built-in bin, up to 51 kg

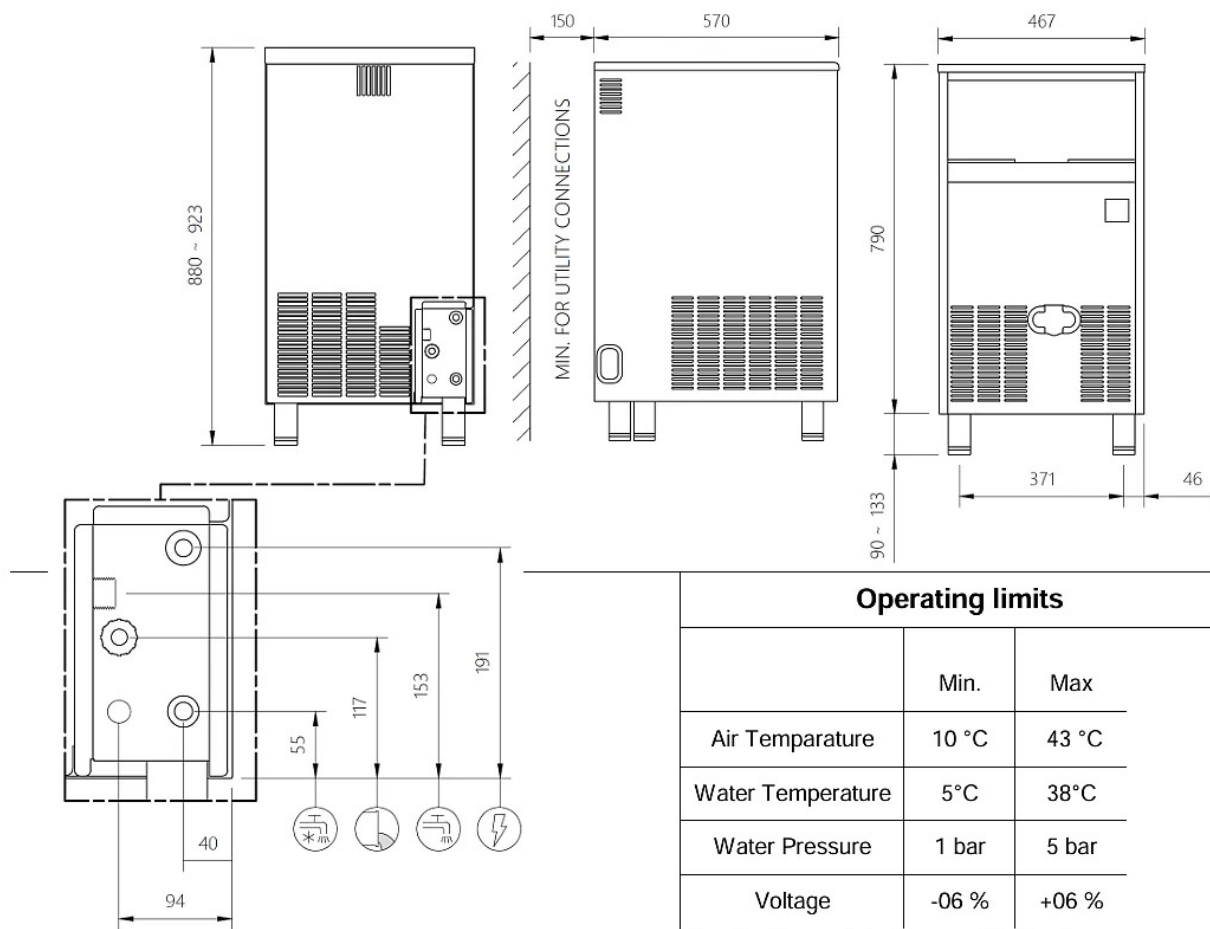

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-06 %	+06 %

Specifications and design are subject to change without notice

MACHINE DATA

Dimensions (LxWxH): 467 x 570 x 875 mm
Net weight 38 kg

SHIPPING DATA

Dimensions (LxWxH): 54 x 64 x 90 cm
Net weight 46 kg

(*) The data refers to the following temperature conditions:
32°C Ambient / 21°C Water

Version	Voltage	Condensation	Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion kW	Consumo Energia (*) kWh/24h	Consumption Water (*) l/h	Instant power W	Cables No. x Ømm²	Fuse A
			10°C/10°C	21°C/10°C	32°C/21°C						
SCH 50 WS 230/50/1	230\50\1	W	52	48	41	1,00	10,0	44,0	476	1,50	10
SCH 50 AS 230/50/1	230\50\1	A	51	47	30	1,00	12,0	4,0	640	1,50	10